


GEHO

Pallet-Stretchwrapper COMFORTSTRETCH

**with profiled
turntable, without
ramp**

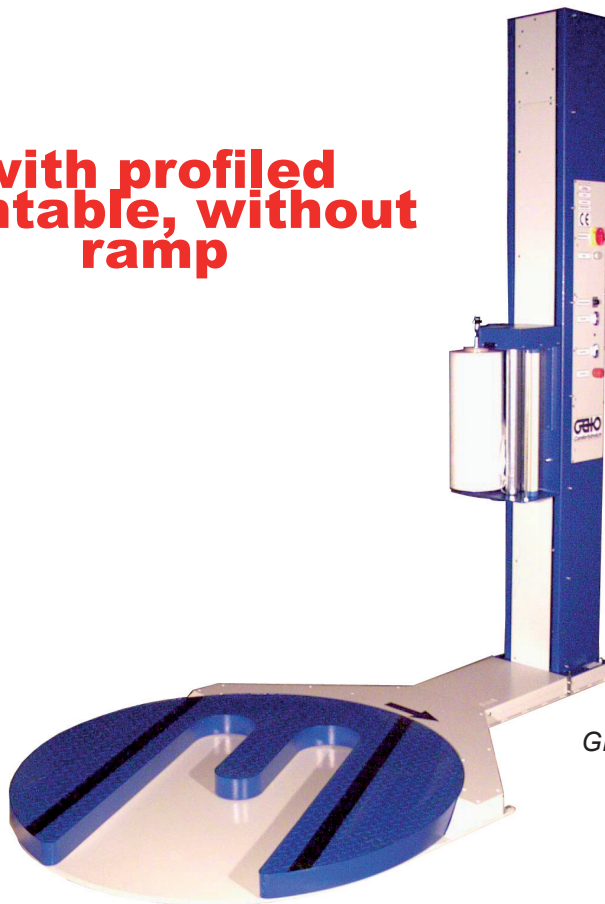

**COMPLETELY
MADE IN
GERMANY**

GEHO Comfortstretch

FILM SEALING UNITS
SHRINK PACK MACHINES
STRETCH WRAPPER
PACKAGING MATERIAL
Production and Sale

GEHO PACK Service GmbH

Neuendeicher Weg 6
D-25436 Heidgraben
Tel.: +49/4122/460 46-30
Fax: +49/4122/460 46-40
<http://www.gehopack.de>
e-Mail: info@gehopack.de

Pallet-Stretchwrapper

GEHO COMFORTSTRETCH

All series of GEHO STRETCHWRAPPER are mounted on a basic plate, they can be installed easily and within a short time. Due to the profiled turntable, the pallet can be placed on the turntable with a pallet stacker. No ramp required. The stretching-process can be controlled manually over tumbler switch.

Short and brief:

- UMADE IN GERMANY
- UProfiled turntable - no ramp
- UElectromagnetic brake
- ULow-build turntable
- UCross winding
- URainresistant stretching
- UAdditional components
- UCE-certified

Workflow:

proceed as follows:

- Set pallet on turntable
- Fasten stretchfilm on pallet
- Start turntable
- Start moving the filmlift up and/or down by a switch
- Stop turntable
- Seperate stretchfilm
- Take off pallet

The stretching process is controlled manually. It is possible to make a crosswinding or spiralwinding or a rainproof stretching with cover sheet.

Special equipment

- top press plate for light pallets, motordriven, can be activated and deactivated easily.
- motordriven adjustable prestretching-device; for reduction of film-quantity and for light pallets.
- softstart with adjustable speed of turntable.
- cover sheet dispenser for one cover sheet roll, adjustable in height
- Mounting frame to let in the stretch wrapper into the floor
- Higher film coulumn for max. load height 3000 mm
- Insert for rotation plate for grating cart

Installation and Maintenance:

All machines of GEHO COMFORTSTRETCH series are installed within a short time. Only the mast has to be raised and fastened with screws and the plug has to be plugged in - the machine is ready for use.

All technical components are - if necessary - easily to be reached by dismantling the coverplate.

Application area:

GEHO stretchwrapping machines are set in for unequal and different pallet loads and different heights of pallets.

The profiled turntable is advantageous for shaky or heavy pallets, and if there is only little space for a ramp.

Control panel



main switch

pilot lamp

tension for stretchfilm
film lift

turntable

emergency stop

Technical Data	Comfortstretch 1500	Comfortstretch 2000
Filmlift	motordriven	motordriven
Height of mast standart	2470 mm	2470 mm
Max height of pallet load	2400 mm	2400 mm
Turntable	Diameter 1500 mm, load bearing capacity up to 1500 kg, profiled	Diameter 1950 mm, load bearing capacity up to 1500 kg, profiled
Turntable rotation	6 rpm	5 rpm
Turntable rotation (special equipment)	1 - 6 rpm, adjustable with soft start	1 - 5 rpm, adjustable with soft start
Filmlift movement	by tumbler switch	by tumbler switch
Top press plate (spwcial equipment)	motordriven with chain	motordriven with chain
Dimension (WxL)	2600 x 1500 mm	3100 x 2000 mm
Weight	ca. 325 kg	ca. 480 kg
Height of turntable	ca. 69 mm	ca. 70 mm
Power supply	400 V; 3 Phasen; 50 Hz	

Measurements and weights are approx. only. Subject to changes without notice