




Pallet-Stretchwrapper SUPERSTRETCH Touch



GEHO Superstretch with
top press plate

**with profiled turn-
table,
without ramp!**

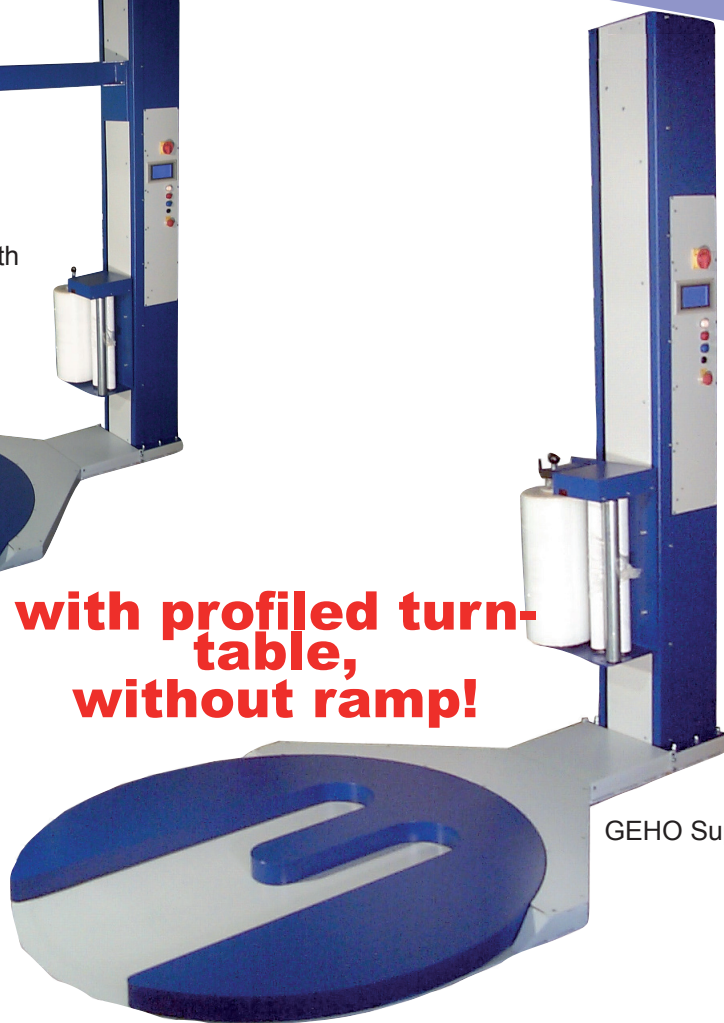

GEHO Superstretch

**COMPLETE-
LY MADE IN
GERMANY**

FILM SEALING UNITS
SHRINK PACK MACHINES
STRETCH WRAPPER
PACKAGING MATERIAL
Production and Sale

GEHO PACK Service GmbH

Neuendeicher Weg 6
D-25436 Heidgraben
Tel.: +49/4122/460 46 30
Fax: +49/4122/460 46 40
<http://www.gehopack.de>
e-Mail: info@gehopack.de

Pallet-Stretchwrapper

GEHO Superstretch touch

All series of GEHO STRETCHWRAPPER are mounted on one basic plate, so that they can be installed easily and within a short time. Due to the profiled turntable, the pallet can be set on the turntable with a pallet stacker. No ramp has to be set in. The stretching process is automatically controlled.

Short and brief:

- UMADE IN GERMANY
- UProfiled turntable - no ramp
- UOptional a closed turntable
- UTurntable with soft start
- UTurntable stop adjustable 160°
- U4 automatically running programs
- UPrograms individually variable
- USupervision of pallet height by photocell
- UAdjustable film tension with electromagnetic filmbrake
- UCrosswinding
- URainproof winding
- UInexpensive
- UDivers special equipments
- UCE-certified

Working sequence proceeds as follows:

- Set pallet on turntable
- Fasten stretchfilm on pallet
- Start program on touch panel
- Separate stretchfilm
- Take off pallet

During the stretching process the operator is free for further activities.

Four programs can be chosen: for example for light pallets, for heavy pallets, for rainproof pallets. All parameter of these programs can be changed individually. Adjustable parameter are e.g.: film tension, amount of bottom windings, amount of top windings (separately), speed of turntable, crosswindings, stop to position top sheet e.t.c.

Special Equipment:

- **Top press plate** for light pallets, motordriven, part of the automatic program. Can be activated and deactivated easily.
- **Motordriven prestretch** to reduce stretchfilm consumption. Adjustable prestretching, bottom and top stretchings can be adjusted separately.
- **Top sheet dispenser** for one roll of top sheet, adjustable in its height.
- **Mounting frame** to let in the stretch wrapper into the floor
- **Higher film column** for max. load height 3000 mm
- **Insert for rotation plate** for grating cart
- **Automatic film tear off** only works with Motor-driven prestretch

Operating Area:

Stretchwrapper of GEHO SUPERSTRETCH-series are set in for different pallet loads and different heights. Four standard programs can be changed individually, so that further possibilities like rainproof pallets etc. can be achieved.

Due to the profiled turntable also very heavy and shaky pallet loads can be set safely with a pallet stacker on the turntable.

Installation and Maintenance:

All machines of GEHO SUPERSTRETCH series are installed within a short time. Only the mast has to be raised and fastened with screws and the plug has to be plugged in - the machine is ready for use. All technical components are - if necessary - easily to be reached by dismantling the coverplates.

| Technical Data | Superstretch 1500 Touch | Superstretch 2000 Touch |
|-------------------------------------|---|---|
| Film lift | motordriven | motordriven |
| Height of mast standard | 2470 mm | 2470 mm |
| Height of mast with top press plate | 3020 mm | 3020 mm |
| Max height of pallet load | 2400 mm | 2400 mm |
| Turntable | Diameter 1500 mm, load bearing capacity up to 1500 kg, profiled | Diameter 1950 mm, load bearing capacity up to 1500 kg, profiled |
| Turntable rotation | 1 - 6 rpm adjustable with softstart | 1 - 5 rpm adjustable with softstart |
| Program | 4 different, variable | 4 different, variable |
| Supervision of pallet height | by photocell | by photocell |
| Top press plate (special equipment) | motordriven with belt | motordriven with belt |
| Dimensions (WxL) | 1500 x 2600 mm | 2000 x 3100 mm |
| Weight | ca. 350 kg | ca. 500 kg |
| height of turntable | ca. 69 mm | ca. 70 mm |
| Power supply | 400 V; 3 Phasen; 50 Hz | 400 V; 3 Phasen; 50 Hz |
| Film brake | electromagnetically | electromagnetically |

Measurements and weights are approx. only. Subject to changes without notice.